

WATER METER DOMIX 60

Features

- ◆ 10" color touchscreen interface for simple and intuitive interaction.
- ◆ Minimum temperature tolerances ($\pm 0.9^{\circ}\text{F}$) thanks to a unique automatic mixing system.
- ◆ Available in models with 2 or 3 inlets, sized 1/2", and with 1 or 2 outlets for mixers.
- ◆ Intelligent software system able to adjust to the specific working conditions.
- ◆ 99-recipe storage capacity to program simple, double or multiple deliveries.
- ◆ Easy to maintain with a self diagnosis program that helps identify problems.
- ◆ Capable of connecting to the cloud for remote assistance and management.
- ◆ FAQ section capable of answering most frequently asked questions right on the display.
- ◆ Automatic by-pass available on all models.



DOMIX 60 2.1

Precision Water Control


The **DOMIX 60 Water Meter** offers pin-point electronic control for your water dosing needs. The **DOMIX** is equipped with an advanced software that guarantees maximum precision, allowing for maximum quality that can be repeated over time.

The **DOMIX 60's** 10" large color touch screen control panel allows very simple and intuitive operation, with the capability of storing up to 99 recipes with single, double or multiple deliveries. The **DOMIX 60** features a self-learning system able to consider the specific working conditions and improve quality making it one of the smartest machines of its kind in the industry.

Technical Data

WATER METER DOMIX 60

Model	DOMIX 60 2.1	DOMIX 60 2.2	DOMIX 60 3.1	DOMIX 60 3.2
Dose (D) or Dose & Mix (DM)	DM	DM	DM	DM
Water Connections (input)	2 x 1/2"	2 x 1/2"	3 x 1/2"	3 x 1/2"
No. of Mixers to be Served	1	2	1	2
Max Water Entry Temperature (°F)	149°	149°	149°	149°
Setting Range (°F)	34°-140°	34°-140°	34°-140°	34°-140°
Temperature Precision (± °F)	0.9°	0.9°	0.9°	0.9°
Max Water Entry Pressure (bar)	5 bar	5 bar	5 bar	5 bar
Min Water Entry Pressure (bar)	1 bar	1 bar	1 bar	1 bar
Maximum Dosing	120 gal (999 lbs)	120 gal (999 lbs)	120 gal (999 lbs)	120 gal (999 lbs)
Dosing Precision (± %)	1	1	1	1
Water Delivery at 1 bar and 68°F (gpm)	5.8 gal (48 lbs)	5.8 gal (48 lbs)	5.8 gal (48 lbs)	5.8 gal (48 lbs)
Water Delivery at 5 bar and 68°F (gpm)	14.5 gal (121 lbs)	14.5 gal (121 lbs)	14.5 gal (121 lbs)	14.5 gal (121 lbs)
Power (A @ 110 v/60Hz)	2	2	2	2

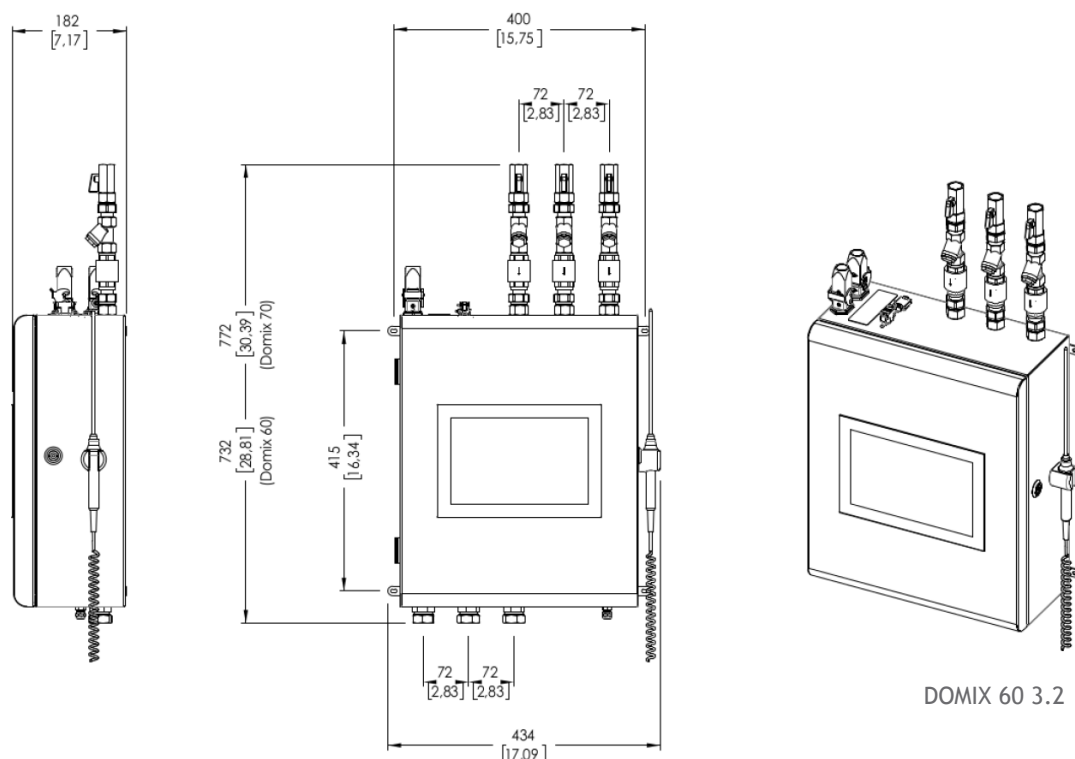

DOMIX 60 3.2

LIMITED WARRANTY

This product is warranted to the original purchaser to be free from material and workmanship defects. This warranty extends for a period of one (1) year from the date of purchase on parts and labor and 90 days on electrical components. For additional information or if you have any questions, please do not hesitate to contact us toll free at 1-800-878-4070.

Please note, specifications are subject to change without notice as we continually work to improve our equipment.



1C Enterprise Place, Hicksville, NY 11801-5356 ♦ Ph: (516) 681-1500 ♦ Fx: (516) 681-1510
1-800-878-4070 ♦ www.empirebake.com ♦ info@empirebake.com