

Project:	
Item #:	
Quantity:	

GLASS DOOR REACH-IN REFRIDGERATORS **EBRRG**

Features

- ♦ Electronic thermostat
- ♦ Digital LED temperature display
- ♦ High efficiency CFC free insulation
- Self-closing doors with full-length handles
- Magnetic gasket can be replaced without tools
- Heating element conceal in door frame to eliminate condensation
- Available in single door, 2-door models
- 4 shelves per door
- Heavy duty casters for easy mobility
- 3 year parts and labor warranty
- ♦ 5 year compressor warranty



The High Efficiency Fridge Solution

You will appreciate the attractive professional aesthetics of this *EBRRG Glass Door Reach-In Refrigerator* which will add curb appeal to any type of business. The *EBRRG* is featured with a heavy duty 304 stainless steel floor, 430 stainless steel exterior door, front panel, & interior walls, self-closing glass doors, digital controls with a LED readout and foamed in place polyurethane cell insulation. Unit is shipped with wheels installed for easy mobility throughout your bakery or restaurant.

These *Glass Door Reach-In Refrigerators* have a high-efficiency CFC free insulation to ensure that the freshness of produce, meats, and dairy and other foods is maintained at optimal temperatures. The *EBRRG* also features an electronic thermostat with a digital LED temperature display for precision control of the fridges temperature. With its durable construction and advanced cooling technology, the *EBRRG Glass Door Reach-In Refrigerators* are an essential investment for bakeries and restaurants alike, promoting food safety, minimizing waste, and ultimately contributing to the success of culinary endeavors.





1C Enterprise Place, Hicksville, NY 11801-5356 • Ph: (516) 681-1500 • Fx: (516) 681-1510 1-800-878-4070 • www.empirebake.com • info@empirebake.com

EBRRG-0124 Page 1 of 2


Technical Data

GLASS DOOR REACH-IN REFRIGERATORS **EBRRG**

	Overall Dimensions			g	Storage	Temperature	Electrical	_
Model	WIDTH (A)	DEPTH (B)	HEIGHT (C)	Net Wt	Capacity	Range	Amps	Power
	in	in	in	lbs	cu. ft.	°F	115V/1Ph/60Hz	BTU/hr
EBRR1G-HC	26.8	32.7	82.7	360	23	33 - 41	3	1670
EBRR2G-HC	54.0	32.0	81.5	570	49	33 - 41	4.5	1670





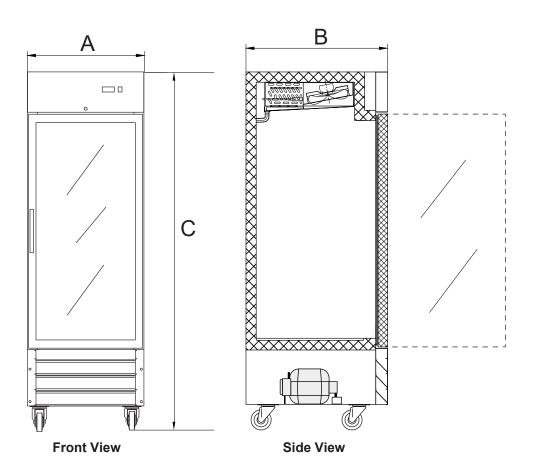

LIMITED WARRANTY

This product is warranted to the original purchaser to be free from material and workmanship defects. This warranty extends for a period of one (1) year from the date of purchase on parts and labor and 90 days on electrical components. For additional information or if you have any questions, please do not hesitate to contact us toll free at 1-800-878-4070.

Please note, specifications are subject to change without notice as we continually work to improve our equipment.



1C Enterprise Place, Hicksville, NY 11801-5356 • Ph: (516) 681-1500 • Fx: (516) 681-1510

1-800-878-4070 • www.empirebake.com • info@empirebake.com

EBRRG-0124 Page 2 of 2