

ELECTRIC DECK OVEN PROOFER **LFM-D/P**

Features

- ◆ Durable Stainless Steel construction.
- ◆ Tempered glass doors.
- ◆ Thick insulating panel between proofer and oven.
- ◆ Internal lighting system.
- ◆ Newly designed steam generator positioned outside the proofer.
- ◆ Automatic ventilation system to prevent the accumulation of steam.
- ◆ Condensation discharge under the proofer.
- ◆ Height adjustable tray support guides.
- ◆ Fast maintenance thanks to the removable side panels.
- ◆ Available with digital or touch screen control panel.
- ◆ Mounted on casters for maneuverability.



Model LFM-D-3T-P74-TS Proofer Base
with Touch Screen Control Panel

Fast, Practical and Easy to Use!

Proofing is undoubtedly one of the most delicate phases of your production. This latest design has renewed its range of proofers for the **LFM-D Modular Electric Deck Oven**, paying careful attention to all the specific features essential for making great products. The **LFM-D Proofers** newly designed steam and heat generator is positioned outside the proofer with an automatic ventilation system that will prevent any accumulation of steam and heat, ensuring you get the perfect proof on your dough. With a high-quality proofer attached to your electric stone hearth deck oven, you can easily and efficiently go from proofer to oven with little effort, while saving valuable floor space in your bakery.


Technical Data

ELECTRIC DECK OVEN PROOFER LFM-D/P

Model	Oven Compatibility*	Overall Dimensions			Pan Capacity	Power (220v/1Ph)	Weight
		Width	Depth	Height			
		in	in	in	# of trays	Amps	lbs
LFMD-2T-P88	LFMD-2T-1; LFMD-2T-2	52.4	49.2	34.6	14	12	230
LFMD-2T-P94-TS	LFMD-2T-1; LFMD-2T-2	52.4	54.3	37.4	14	12	230
LFMD-2T-P68	LFMD-2T-3	52.4	49.2	26.8	10	12	230
LFMD-2T-P74-TS	LFMD-2T-3	52.4	54.3	29.5	10	12	230
LFMD-2TH-P88	LFMD-2TH-1; LFMD-2TH-2	44.5	57.1	34.6	14	12	270
LFMD-2TH-P94-TS	LFMD-2TH-1; LFMD-2TH-2	44.5	62.2	37.4	14	12	270
LFMD-2TH-P68	LFMD-2TH-3	44.5	57.1	26.8	10	12	270
LFMD-2TH-P74-TS	LFMD-2TH-3	44.5	62.2	29.5	10	12	270
LFMD-3T-P88	LFMD-3T-1; LFMD-3T-2	68.5	43.3	34.6	28	12	280
LFMD-3T-P94-TS	LFMD-3T-1; LFMD-3T-2	68.5	48.4	37.4	28	12	280
LFMD-3T-P68	LFMD-3T-3	68.5	43.3	26.8	20	12	280
LFMD-3T-P74-TS	LFMD-3T-3	68.5	48.4	29.5	20	12	280

* Proofer bases will affect overall oven height. Exact dimensions will vary based on the oven configuration you choose. Please speak with an Empire representative for details.

** Proofer base options are also available for LFMD models 4T & 6T. Please call for specs and pricing.

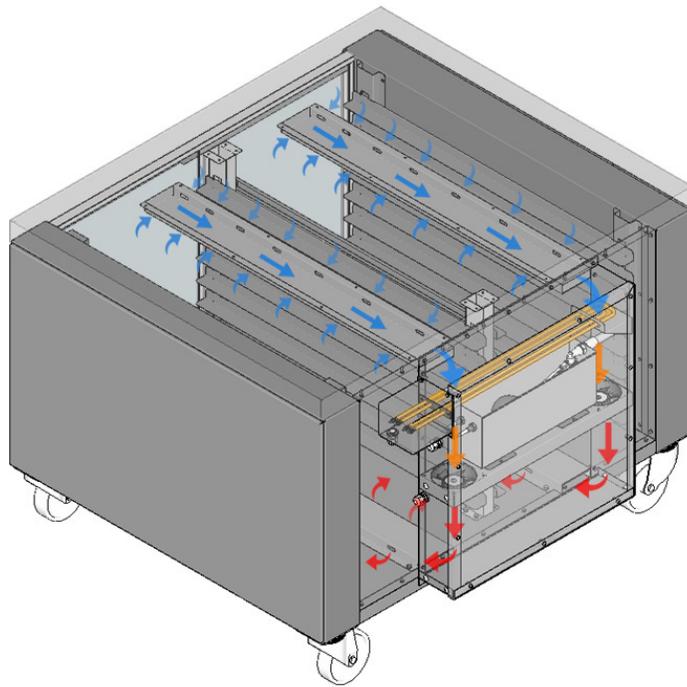

UTILITIES ¹	
Water Inlet	1/2" NPT ²
Drain	3/4" NPT
Electric	220v/1Ph/60Hz

¹ Water and Electrical connections located on the back of the unit.

² Approved water filter and pressure regulator required to ensure proper performance.

LIMITED WARRANTY

This product is warranted to the original purchaser to be free from material and workmanship defects. This warranty extends for a period of one (1) year from the date of purchase on parts and labor and 90 days on electrical components. For additional information or if you have any questions, please do not hesitate to contact us toll free at 1-800-878-4070.

Please note, specifications are subject to change without notice as we continually work to improve our equipment.



1C Enterprise Place, Hicksville, NY 11801-5356 ♦ Ph: (516) 681-1500 ♦ Fx: (516) 681-1510
 1-800-878-4070 ♦ www.empirebake.com ♦ info@empirebake.com